

Typical properties of biodegradable M·VERA® injection moulding compounds

	Unit	M·VERA® GP1005 (B0001) ^a	M·VERA® GP1012 (B0254) ^a	M·VERA® GP1015 (B0071)	M·VERA® GP1025 (B0147) ^a	M·VERA® GP1028 (B0249) ^a	M·VERA® GP1045 (B0217)
Food contact approval EU 10/2011	-	√ ^{kc}	√ ^{kc}	√ ^c	√ ^c	√ ^c	√ ^{kc}
Certificates	-	-	OK biodegradable SOIL; OK compost HOME	OK compost INDUSTRIAL	OK compost INDUSTRIAL	OK compost INDUSTRIAL ^b	OK biodegradable SOIL; OK compost HOME
Renewable content in the polymer	%	~50	~100	~70	~100	~50	~100
Density	g/cm ³	1.44	1.22	1.44	1.49	1.31	1.20
MVR (190 °C/2.16 kg)	cm ³ /10 min	12	9 ^e	10	11	19	9 ^e
Tensile modulus^f	MPa	1,190	1,750	4,100	8,480	2,800	1,500
Tensile strength^f	MPa	26	25	40	65	42	26
Yield strength^f	MPa	26	25	41	n.d.	42	26
Elongation at yield^f	%	7	3.7	2	n.d.	2.5	3
Elongation at break^f	%	20	4	4.7	1.3	20	5.5
Charpy notched impact strength^g	kJ/m ²	3.2	2.2	3.5	2	8	2
Charpy impact strength^l	kJ/m ²	46	12	50	19	180	14
HDT/B (ISO 75/B)	°C	95	104	50–115 ^h	50–115 ^h	50–80 ^h	98
Flammability (ISO 3795/DIN 75200)	mm/min	-	-	-	-	-	-

^a product in development, preliminary data ^b certification in progress ^c available on request ^e (160/5) ^f according ISO 527-1/-2 ^g ISO 179-1/1eA ^l ISO 179-1/1eU ^h depending on mould temperature and annealing process afterwards ⁱ certification possible
^k food contact limitations, for more informations please contact BIO-FED n.d. = not determined

The information given here is only valid for M·VERA® grades in their original packaging, sold by BIO-FED® and/or its authorized partners. If M·VERA® grades are mixed in any capacity with foreign material, beside masterbatches recommended by BIO-FED®, BIO-FED® declines any further responsibility. M·VERA® grades shall be stored in dry, closed rooms in closed packaging in original state. For keeping the product properties, the material must be protected against direct sun and the temperature must not exceed 50 °C at any time during transport and storage. M·VERA® grades have a remaining shelf life of six (6) months at room temperature (23 °C) from the delivery date. We recommend that products made of M·VERA® grades shall be stored under same conditions. All M·VERA® products listed here can be colored with AF-Eco® masterbatches from AF-COLOR, also certified according to EN 13432. Please note that the use of AF-Eco® might influence the mechanical and/or optical properties of the final part.




BIO-FED
Member of the Feddersen Group

BioCampus Cologne · Nattermannallee 1
50829 Cologne · Germany
Phone: +49 221 88 88 94-00
Fax: +49 221 88 88 94-99
info@bio-fed.com · www.bio-fed.com

The information contained herein is based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. BIO-FED®, M·VERA® and AF-Eco® are registered brands of AKRO-PLASTIC GmbH.

09/2023

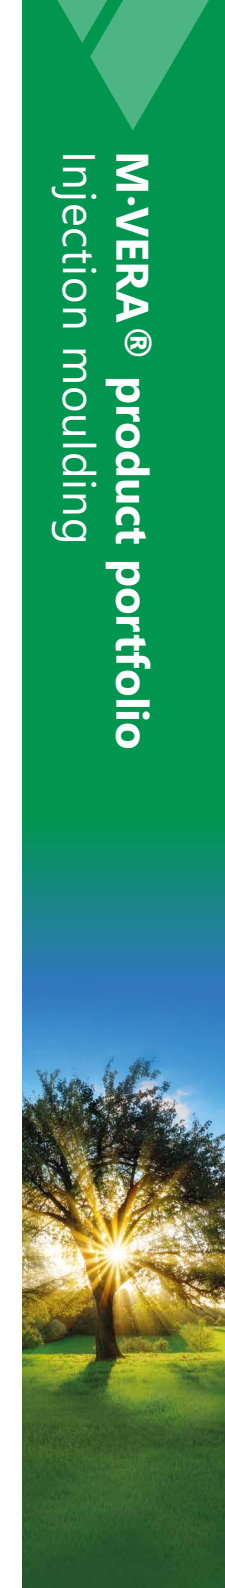

Typical properties of biomass-balanced M·BIOBASE® polypropylene compounds

	Unit	M·BIOBASE® PPH 032 nat	M·BIOBASE® PPC 035 nat	M·BIOBASE® PPH 120 nat	M·BIOBASE® PPH 500 nat
Food contact approval EU 10/2011	-	√ ^d	√ ^d	√ ^d	√ ^d
Certificates	-	ISCC PLUS	ISCC PLUS	ISCC PLUS	ISCC PLUS
Mass-balanced content/Allocation factor^a	%	100	90	100	100
Density	g/cm ³	0.905	0.905	0.905	0.905
MFR (230 °C/2.16 kg)	g/10 min	3.2	3.5	12	50
Tensile modulus^b	MPa	1,700	1,350	1,550	1,650
Tensile strength at yield^b	MPa	33	25	34	35
Elongation at yield^b	%	7	6	9	9
Elongation at break^b	%	27	110	330	47
Charpy notched impact strength +23 °C^c	kJ/m ²	6	15	3.5	2
Charpy notched impact strength -20 °C^c	kJ/m ²	n.a.	6.5	n.a.	n.a.
Suitable for	-	Extrusion, BOPP films	Injection moulding (e.g. luggage, bins, crates, technical parts)	Injection moulding (e.g. thin wall packaging)	Injection moulding (e.g. thin wall packaging and containers with excellent transparency)

^a The allocation factor is the percentage of biomass allocated to the product (max. value: 100%) = percentage of replaced fossil based resources in the value chain. The allocation factor does not indicate how much biomass is actually in the product. It refers to the organic content (e.g. polymers) in the product. ^b ISO 527-1/-2 ^c ISO 179-1/1eA ^d available on request n.a. = not applicable

The information given here is only valid for M·BIOBASE® grades in their original packaging, sold by BIO-FED® and/or its authorized partners. If M·BIOBASE® grades are mixed in any capacity with foreign material, beside masterbatches recommended by BIO-FED®, BIO-FED® declines any further responsibility. M·BIOBASE® grades shall be stored in dry, closed rooms in closed packaging in original state. For keeping the product properties, the material must be protected against direct sun and the temperature must not exceed 50 °C at any time during transport and storage. M·BIOBASE® grades have a remaining shelf life of twelve (12) months at room temperature (23 °C) from the delivery date. We recommend that products made of M·BIOBASE® grades shall be stored under same conditions. All M·BIOBASE® products listed here can be colored with AF-CirColor® and AF-CirCarbon® masterbatches from AF-COLOR, certified according to the sustainability standard ISCC PLUS and/or REDcert². Furthermore AF-CirComplex® additive masterbatches are available. Please note that the use of masterbatches might influence the mechanical and/or optical properties of the final part.



BIO-FED
Member of the Feddersen Group

BioCampus Cologne · Nattermannallee 1
50829 Cologne · Germany
Phone: +49 221 888894-00
Fax: +49 221 888894-99
info@bio-fed.com · www.bio-fed.com

The information contained herein is based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. BIO-FED®, M·VERA®, M·BIOBASE®, M·CYCLOSE®, AF-Eco®, AF-CirColor®, AF-CirCarbon® and AF-CirComplex® are registered brands of AKRO-PLASTIC GmbH.
03/2024



Typical properties of biomass-balanced filled M·BIOBASE® polypropylene compounds

	Unit	M·BIOBASE® PPH 050 GF30 nat	M·BIOBASE® PPH 080 WF20 nat	M·BIOBASE® PPH 130 WF30 nat	M·BIOBASE® PPH 230 WF20 nat
Food contact approval EU 10/2011	-	√ ^d	-	-	-
Certificates	-	ISCC PLUS; REDcert ²	ISCC PLUS; REDcert ²	ISCC PLUS; REDcert ²	ISCC PLUS; REDcert ²
Mass-balanced content/Allocation factor ^a	%	96	80 ^e	70 ^e	80 ^e
Filler	%	30 % glass fibre	20 % wood fibre	30 % wood fibre	20 % wood fibre
Bio-based content	%	0	20	30	20
Appearance	-	-	brownish, fibres visible	brownish, fibres visible	brownish, fibres visible
Density	g/cm ³	1.12	0.968	1.006	0.956
MFR (230 °C/2.16 kg)	g/10 min	5	8	13	23
Tensile modulus ^b	MPa	7,350	3,040	3,570	2,670
Tensile strength at break ^b	MPa	95	39	39	28
Elongation at break ^b	%	3.2	4.3	3.2	5.2
Charpy notched impact strength +23 °C ^c	kJ/m ²	14.5	2.7	2.5	2.2
Charpy unnotched impact strength +23 °C ^c	kJ/m ²	58.5	17.4	13.9	13.6
Suitable for	-	Injection moulding (e.g. technical parts)	Injection moulding (e.g. consumer goods)	Injection moulding (e.g. consumer goods)	Injection moulding (e.g. consumer goods)

^a The allocation factor is the percentage of biomass allocated to the product (max. value: 100%) = percentage of replaced fossil based resources in the value chain. The allocation factor does not indicate how much biomass is actually in the product. It refers to the organic content (e.g. polymers) in the product. ^b ISO 527-1/-2 ^c ISO 179-1/1eA ^d available on request ^e estimated value; exact value on request

The information given here is only valid for M·BIOBASE® grades in their original packaging, sold by BIO-FED® and/or its authorized partners. If M·BIOBASE® grades are mixed in any capacity with foreign material, beside masterbatches recommended by BIO-FED®, BIO-FED® declines any further responsibility. M·BIOBASE® grades shall be stored in dry, closed rooms in closed packaging in original state. For keeping the product properties, the material must be protected against direct sun and the temperature must not exceed 50 °C at any time during transport and storage. M·BIOBASE® grades have a remaining shelf life of twelve (12) months at room temperature (23 °C) from the delivery date. We recommend that products made of M·BIOBASE® grades shall be stored under same conditions. All M·BIOBASE® products listed here can be colored with AF-CirColor® and AF-CirCarbon® masterbatches from AF-COLOR, certified according to the sustainability standard ISCC PLUS and/or REDcert². Furthermore AF-CirComplex® additive masterbatches are available. Please note that the use of masterbatches might influence the mechanical and/or optical properties of the final part.



BIO-FED
Member of the Feddersen Group

BioCampus Cologne · Nattermannallee 1
50829 Cologne · Germany
Phone: +49 221 888894-00
Fax: +49 221 888894-99
info@bio-fed.com · www.bio-fed.com

The information contained herein is based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. BIO-FED®, M·VERA®, M·BIOBASE®, M·CYCLOSE®, AF-Eco®, AF-CirColor®, AF-CirCarbon® and AF-CirComplex® are registered brands of AKRO-PLASTIC GmbH. 03/2024



Typical properties of M-VERA® biocompounds for extrusion and thermoforming

	Unit	M-VERA® GP4001 (B0148) ^a	M-VERA® GP4003 (B0219) ^a	M-VERA® GP4004 (B0165)	M-VERA® GP4005 (B0242) ^a	M-VERA® GP4006 (B0241) ^a
Food contact approval EU 10/2011	-	√ ^f	√ ^f	√ ^f	√ ^f	√ ^f
Certificates	-	OK compost INDUSTRIAL	OK compost INDUSTRIAL	OK compost INDUSTRIAL ⁱ	OK compost INDUSTRIAL	OK compost INDUSTRIAL ⁱ
Renewable content in the polymer	%	~70	~50	n.a.	~100	~80
Density	g/cm ³	1.44	1.32	1.41	1.25	1.25
MVR (190 °C/2.16 kg)	cm ³ /10 min	2–5	2–5	2–5	2–8	2–5
Tensile modulus^f	MPa	2,650	1,850	370/185 ^e	2,150	1,800
Tensile strength^f	MPa	34	25	27/28 ^e	34	32
Yield strength^f	MPa	34	25	-	32	32
Elongation at yield^f	%	3.1	2.5	-	2.8	3.4
Elongation at break^f	%	30	25	400/460 ^e	9	40
Dart-drop Impact Test^d Force_{max} @ 23 °C	N	1,030	1,080	-	72	840
Dart-drop Impact Test^d Energy_{max} @ 23 °C	J	3.7	6.3	-	0.15	2.2
Dart-drop Impact Test^d Deformation_{max} @ 23 °C	mm	7.6	10.9	-	4.5	6.2
Dart-drop Impact Test^d Force_{max} @ 4 °C	N	1,070	1,560	-	65	1,223
Dart-drop Impact Test^d Energy_{max} @ 4 °C	J	2.7	8.4	-	0.11	3.2
Dart-drop Impact Test^d Deformation_{max} @ 4 °C	mm	5.7	8.4	-	0.9	6.3

^a product in development, preliminary data ^b certification in progress ^c ISO 527-3; determined in MD on 0.8 mm thick test specimens ^d ISO 6603-2 (4,4 m/s) ^e in MD/TD; (MD) = Machine direction; (TD) = Transversal direction ^f available on request ⁱ certification possible
n.a. = not applicable

The information given here is only valid for M-VERA® grades in their original packaging, sold by BIO-FED® and/or its authorized partners. If M-VERA® grades are mixed in any capacity with foreign material, beside masterbatches recommended by BIO-FED®, BIO-FED® declines any further responsibility. M-VERA® grades shall be stored in dry, closed rooms in closed packaging in original state. For keeping the product properties, the material must be protected against direct sun and the temperature must not exceed 50 °C at any time during transport and storage. M-VERA® grades have a remaining shelf life of six (6) months at room temperature (23 °C) from the delivery date. We recommend that products made of M-VERA® grades shall be stored under same conditions. All M-VERA® products listed here can be colored with AF-Eco® masterbatches from AF-COLOR, also certified according to EN 13432. Please note that the use of AF-Eco® might influence the mechanical and/or optical properties of the final part.



BIO-FED
Member of the Feddersen Group

BioCampus Cologne · Nattermannallee 1
50829 Cologne · Germany
Phone: +49 221 88 88 94-00
Fax: +49 221 88 88 94-99
info@bio-fed.com · www.bio-fed.com

The information contained herein is based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. BIO-FED®, M-VERA® and AF-Eco® are registered brands of AKRO-PLASTIC GmbH.

10/2022



Typical properties of biodegradable M·VERA® filament compounds

	Unit	M·VERA® F4001 (B0088) ^a	M·VERA® F4002 (B0221) ^a	M·VERA® F4003 (B0270) ^a
Food contact approval EU 10/2011	-	√ ^f	√ ^f	√ ^f
Certificates	-	OK compost INDUSTRIAL ^e	OK compost INDUSTRIAL ^e	OK compost INDUSTRIAL ^e
Biobased carbon content^c	%	~80	~100	~70
Transparency	-	white	transparent	grey
Density	g/cm ³	1.26	1.26	1.43
MVR (190 °C/2.16 kg)	cm ³ /10 min	2–5	2–5	2–5
Tensile modulus^d	MPa	2,450	3,500	2,600
Tensile strength^d	MPa	44	45	30
Elongation at break^d	%	43	<5	30

^a product in development, preliminary data ^c calculated according ISO 16620; TC ^d according ISO 527 -1/-2 ^e certification possible ^f available on request n.a. = not applicable

The information given here is only valid for M·VERA® grades in their original packaging, sold by BIO-FED® and/or its authorized partners. If M·VERA® grades are mixed in any capacity with foreign material, beside masterbatches recommended by BIO-FED®, BIO-FED® declines any further responsibility. M·VERA® grades shall be stored in dry, closed rooms in closed packaging in original state. For keeping the product properties, the material must be protected against direct sun and the temperature must not exceed 50 °C at any time during transport and storage. M·VERA® grades have a remaining shelf life of six (6) months at room temperature (23 °C) from the delivery date. We recommend that products made of M·VERA® grades shall be stored under same conditions. All M·VERA® products listed here can be colored with AF-Eco® masterbatches from AF-COLOR, also certified according to EN 13432. Please note that the use of AF-Eco® might influence the mechanical and/or optical properties of the final part.



BIO-FED
Member of the Feddersen Group

BioCampus Cologne · Nattermannallee 1
50829 Cologne · Germany
Phone: +49 221 88 88 94-00
Fax: +49 221 88 88 94-99
info@bio-fed.com · www.bio-fed.com

The information contained herein is based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. BIO-FED®, M·VERA® and AF-Eco® are registered brands of AKRO-PLASTIC GmbH.

10/2022



Typical properties of biodegradable M-VERA® film compounds

	Unit	M-VERA® B5018 (B0280)	M-VERA® B5019 (B0041)	M-VERA® B5027 (B0279)	M-VERA® B5029 (B0155)	M-VERA® B5033 (B0267)	M-VERA® B5037 (B0183)	M-VERA® B5039 (B0186)
Food contact approval EU 10/2011	-	√ ^f	√ ^f	√ ^f	√ ^f	√ ^f	√ ^f	√ ^f
Certificates	-	OK compost INDUSTRIAL	OK compost INDUSTRIAL	OK compost INDUSTRIAL	OK compost INDUSTRIAL	OK compost HOME	OK compost INDUSTRIAL	OK compost INDUSTRIAL
Biobased carbon content^c	%	n.a.	n.a.	n.a.	n.a.	>50	n.a.	n.a.
Transparency	-	opaque	translucent	opaque	opaque	opaque	opaque	opaque
Density	g/cm ³	1.4	1.23	1.5	1.41	1.30	1.51	1.45
MVR (190 °C/2.16 kg)	cm ³ /10 min	2–5	2–5	2–5	2–5	1–5	1–5	1–5
Tensile modulus^d	MPa	240/150	1,150/470	240/165	380/175	250/150	175/160	150/145
Tensile strength^d	MPa	21/21	21/30	19/20	25/30	19/20	22/22	30/31
Elongation at break^d	%	330/410	210/350	340/460	410/480	350/550	505/510	525/550
Tear strength (ISO 6383)	N/mm	73/68	12/20	85/50	105/48	200/250	150/170	105/145

^a product in development, preliminary data ^b certification in progress ^c ISO 16620; TC ^d according ISO 527-3; values were determined on 25 µm blown film samples (BUR 1:3) and given in MD/TD; MD = machine direction; TD = transversal direction ^e certification possible
^f available on request n.a. = not applicable

The information given here is only valid for M-VERA® grades in their original packaging, sold by BIO-FED® and/or its authorized partners. If M-VERA® grades are mixed in any capacity with foreign material, beside masterbatches recommended by BIO-FED®, BIO-FED® declines any further responsibility. M-VERA® grades shall be stored in dry, closed rooms in closed packaging in original state. For keeping the product properties, the material must be protected against direct sun and the temperature must not exceed 50 °C at any time during transport and storage. M-VERA® grades have a remaining shelf life of six (6) months at room temperature (23 °C) from the delivery date. We recommend that products made of M-VERA® grades shall be stored under same conditions. All M-VERA® products listed here can be colored with AF-Eco® masterbatches from AF-COLOR, also certified according to EN 13432. Please note that the use of AF-Eco® might influence the mechanical and/or optical properties of the final part.



BIO-FED
Member of the Feddersen Group

BioCampus Cologne · Nattermannallee 1
50829 Cologne · Germany
Phone: +49 221 8888 94-00
Fax: +49 221 8888 94-99
info@bio-fed.com · www.bio-fed.com

The information contained herein is based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. BIO-FED®, M-VERA® and AF-Eco® are registered brands of AKRO-PLASTIC GmbH.

09/2023



Typical properties of biodegradable M·VERA® film compounds

	Unit	M·VERA® A5001 (B0090)	M·VERA® A5002 (B0141) ^a	M·VERA® A5003 (B0162)
Food contact approval EU 10/2011	-	√ ^f	√ ^f	√ ^f
Certificates	-	OK compost INDUSTRIAL	Biodegradable in Soil	OK compost INDUSTRIAL ^e
Biobased carbon content^c	%	n.a.	n.a.	n.a.
Transparency	-	opaque	opaque	opaque
Density	g/cm ³	1.40	1.26	1.33
MVR (190 °C/2.16 kg)	cm ³ /10 min	2–5	2–5	2–5
Tensile modulus^d	MPa	380/170	310/170	320/155
Tensile strength^d	MPa	25/30	26/35	30/40
Elongation at break^d	%	410/470	390/540	450/455
Tear strength (ISO 6383)	N/mm	100/50	150/70	105/33

^a product in development, preliminary data ^c ISO 16620; TC ^d according ISO 527-3 ^e certification possible ^f available on request n.a. = not applicable

The information given here is only valid for M·VERA® grades in their original packaging, sold by BIO-FED® and/or its authorized partners. If M·VERA® grades are mixed in any capacity with foreign material, beside masterbatches recommended by BIO-FED®, BIO-FED® declines any further responsibility. M·VERA® grades shall be stored in dry, closed rooms in closed packaging in original state. For keeping the product properties, the material must be protected against direct sun and the temperature must not exceed 50 °C at any time during transport and storage. M·VERA® grades have a remaining shelf life of six (6) months at room temperature (23 °C) from the delivery date. We recommend that products made of M·VERA® grades shall be stored under same conditions. All M·VERA® products listed here can be colored with AF-Eco® masterbatches from AF-COLOR, also certified according to EN 13432. Please note that the use of AF-Eco® might influence the mechanical and/or optical properties of the final part.



BIO-FED
Member of the Feddersen Group

BioCampus Cologne · Nattermannallee 1
50829 Cologne · Germany
Phone: +49 221 888894-00
Fax: +49 221 888894-99
info@bio-fed.com · www.bio-fed.com

The information contained herein is based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. BIO-FED®, M·VERA® and AF-Eco® are registered brands of AKRO-PLASTIC GmbH.

09/2023

