

# AKROMID® S3 GF 30 8 natural (7384)

## Preliminary Technical Description



### Product Description

AKROMID® S3 GF 30 8 natural (7384): Partially biobased injection moulding grade based on Polyamide 6.10

Applications: Components in food industry  
Suitable for: Injection moulding parts  
Reinforcement: 30 % glass fibre  
Food contact approval: Yes, EU 10/2011

### Properties\*

	Standard	Unit	AKROMID® S3 GF 30 8 natural (7384)
Melting point	-	°C	220
Density	ISO 1183	g/cm <sup>3</sup>	1.31
Humidity absorption (70 °C, 62 % r.H.)	ISO 1110	%	1.2
Renewable content	-	%	~60
Tensile modulus (d.a.m./conditioned)	ISO 527-2	MPa	8,200/6,000
Stress at yield (d.a.m./conditioned)	ISO 527-2	MPa	160/110
Strain at break (d.a.m./conditioned)	ISO 527-2	%	3/6
Charpy impact strength (d.a.m./conditioned)	ISO 179-1/1eU	kJ/m <sup>2</sup>	70/70
Charpy notched impact strength (d.a.m./conditioned)	ISO 179-1/1eA	kJ/m <sup>2</sup>	12/-
Heat distortion temperature, HDT/A	ISO 75/A	°C	205
Mold shrinkage (flow/transverse)	ISO 294-4	%	0.3/0.9
Flammability acc. UL94 (0.8 mm)	UL94	Class	HB

The information contained herein is based on our current knowledge and experience. A legally binding promise of certain characteristics or suitability for a concrete individual case cannot be derived from this information. The information supplied here is not intended to release processors and users from the responsibility of carrying out their own tests and inspections in each concrete individual case. BIO-FED®, AKROMID® and AF-Eco® are registered brands of AKRO-PLASTIC GmbH.



**BIO-FED**

Branch of AKRO-PLASTIC GmbH

BioCampus Cologne · Nattermannallee 1  
50829 Cologne · Germany  
Phone: +49 221 888894-00  
Fax: +49 221 888894-99  
info@bio-fed.com · www.bio-fed.com

# AKROMID® S3 GF 30 8 natural (7384)

## Processing Guide



### Processing Recommendations

#### Drying:


- Drying time 0–4 h
- Drying temperature 80 °C
- Processing moisture 0.02–0.1 %

#### Equipment:

- AKROMID® S grades are designed for standard equipment

### Processing Temperatures

Grade	Mould Temp.	Nozzle	Zone 3	Zone 2	Zone 1
AKROMID® S3 GF 30 8 natural (7384)	80–100 °C	240–300 °C	240–290 °C	240–290 °C	240–290 °C

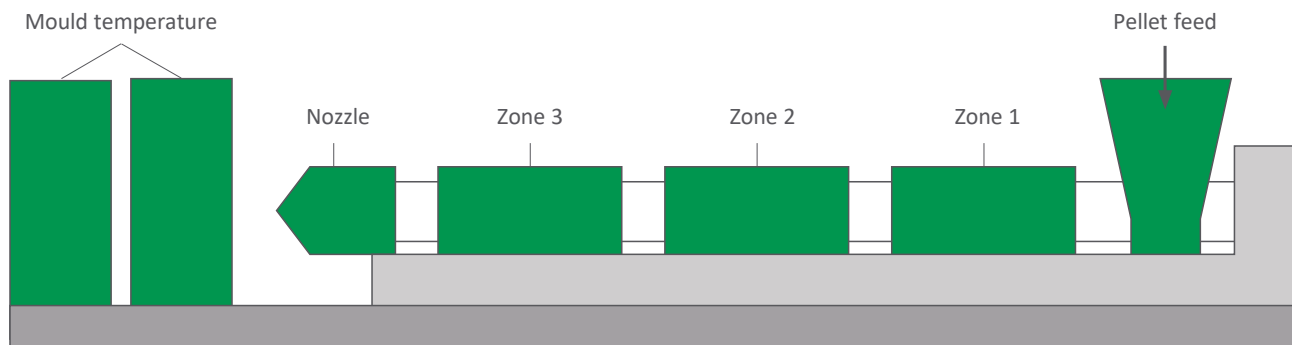

**BIO-FED**

Branch of AKRO-PLASTIC GmbH

BioCampus Cologne · Nattermannallee 1  
50829 Cologne · Germany  
Phone: +49 221 888894-00  
Fax: +49 221 888894-99  
info@bio-fed.com · www.bio-fed.com